

Technical Data VACUDEST XS

52,500 – 80,000 gal industrial wastewater per year

- Flexible adjustment of the treatment capacity without additional space requirement
- VACUDEST Modular-System – Customized systems
- Energy efficient due to 95 % energy recycling
- Cost efficient due highest evaporation rates
- Comfortable Vacutouch control system including internet connection
- State of the art technology stands for highest distillate quality

VACUDEST XS

Our VACUDEST XS is now even more flexible. The treatment capacity can be increased within the size and without requiring any additional space. Simple and inexpensive by means of a software update.

VACUDEST Modular-System – Features

- Destcontrol to further improve distillate quality
- e-service, internet connection of Vacutouch control system




Technical Data

Operating hours package	annual capacity*	Reference capacity with pure water	Average capacity with wastewater*	Electrical load	Weight (empty)	Energy consumption starting from
5.750 h / year	~ 52,500 gal	50 l/h	37,5 l/h	5,5 kW	1874 lb	0.25 kWh/gal
8.750 h / year	~ 80,000 gal					

* Depending on the booked operating hours package

Dimensions (inch)

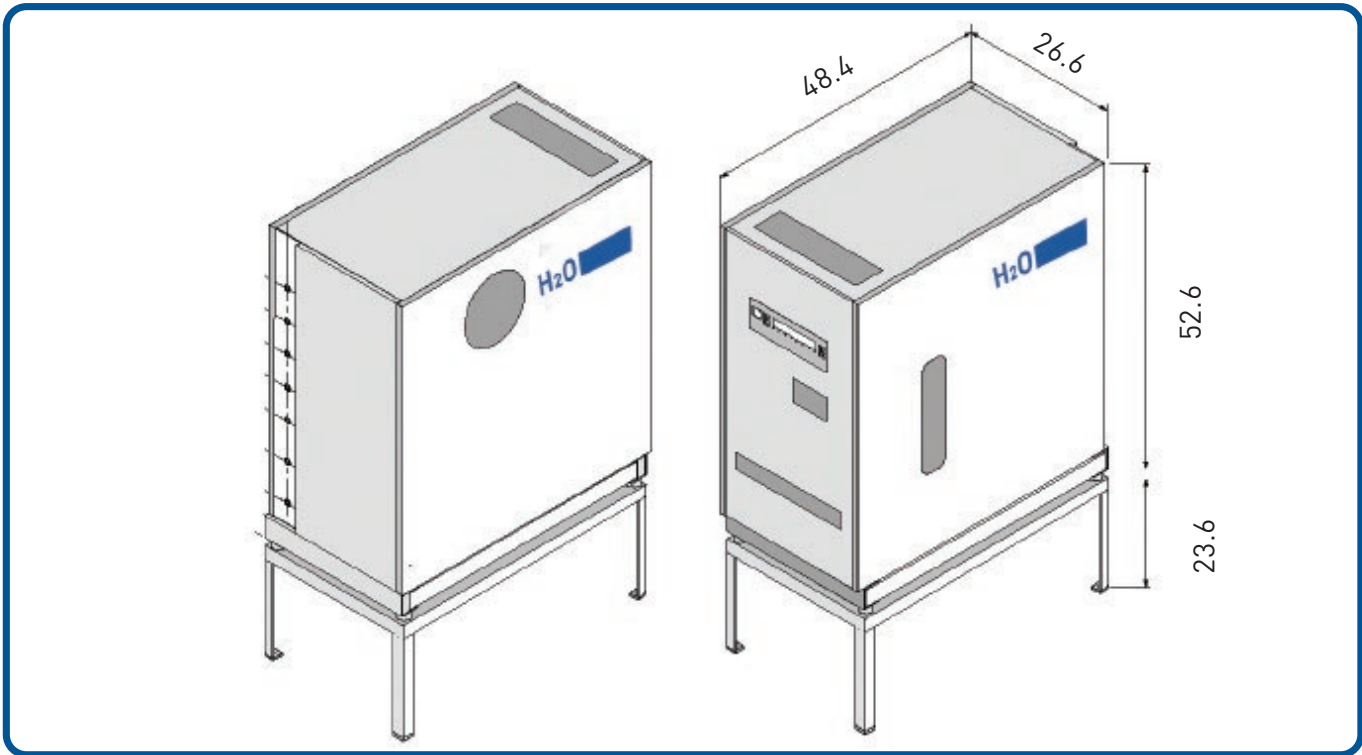

Dimensions of the VACUDEST vacuum distillation systems with optimal maintenance space

Copyright © H2O GmbH 2024 US-DB-07/2024