 German Engineering

Technical Data VACUDEST XXL

30,000 m³ industrial wastewater per year

- VACUDEST Modular-System – Customized systems
- Energy efficient due to 95 % energy recycling
- Cost efficient due highest evaporation rates
- Maintenance friendly design to optimize system availability
- Comfortable Vacutouch control system including internet connection
- State of the art technology stands for highest distillate quality

VACUDEST XXL

VACUDEST Modular-System – Features

- Activepowerclean self-cleaning heat exchanger, to reduce operation cost
- Clearcat condensation stage for complete removal of hydrocarbons
- Destcontrol to further improve distillate quality
- e-service, internet connection of Vacutouch control system
- Premium exhaust air cooling, premium noise protection and much more




Technical Data

VACUDEST	annual capacity*	Reference capacity with pure water	Average capacity with wastewater*	Electrical load	Weight (empty)	Energy consumption starting from
XXL 30,000	30,000 m ³	5,000 l/h	3,750 l/h	315 kW	22,000 kg	40 kWh/m ³

* 8,000 hours of operation, 5 % average evaporation residue of the wastewater

Dimensions (mm)

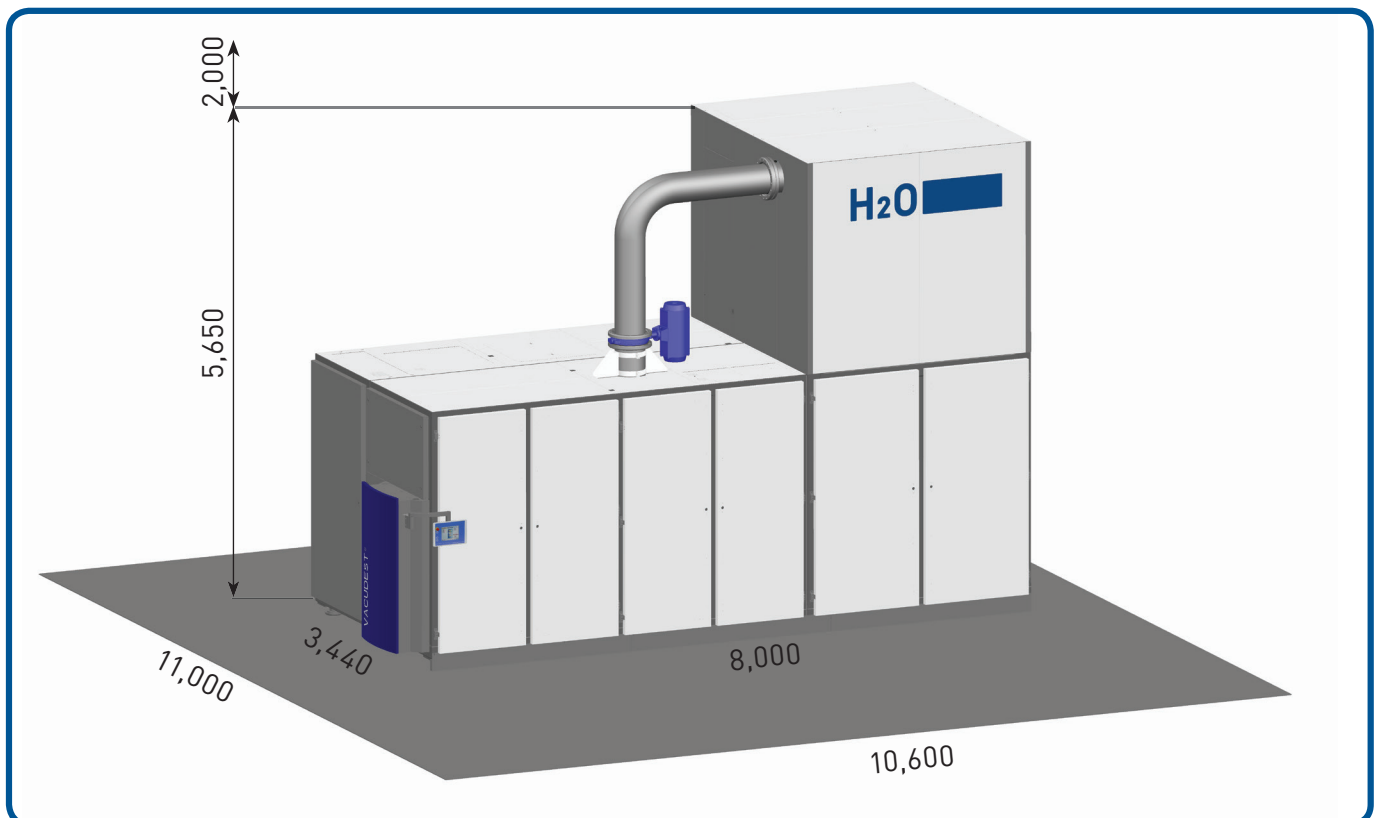

Dimensions of the VACUDEST vacuum distillation systems with optimal maintenance space

Copyright © H2O GmbH 2019 - GB-DB-03/2019